


ARMY RESEARCH LABORATORY



# Test Results From a 37-mm Segmented-Chamber Bulk-Loaded Liquid Propellant Gun

T. E. Rosenberger  
I. C. Stobie  
J. D. Knapton

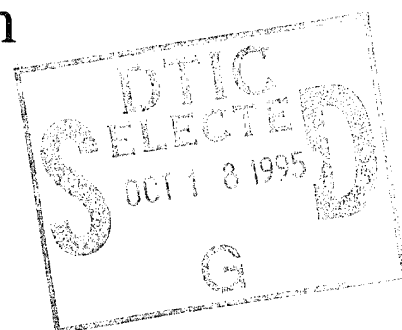

ARL-TR-871

September 1995

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

19951017 117

DOCUMENT CONTAINED IN

## NOTICES

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 1995		3. REPORT TYPE AND DATES COVERED Final, Jan 93 - Oct 94
4. TITLE AND SUBTITLE Test Results From a 37-mm Segmented-Chamber Bulk-Loaded Liquid Propellant Gun			5. FUNDING NUMBERS PR: 1L162618AH80	
6. AUTHOR(S) T. E. Rosenberger, I. C. Stobie, and J. D. Knapton				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WT-PA Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER  ARL-TR-871	
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  A program was initiated at the U.S. Army Research Laboratory (ARL) to investigate the use of segmented-chamber configurations to control the ballistic variability in bulk-loaded liquid propellant guns (BLPG). A series of gun firings was performed in a 37-mm BLPG using OTTO II monopropellant. Results of these tests indicated that a radial igniter and solid propellant booster with various segmented-chamber concepts are favorable in controlling the combustion evolution and ballistic stability in this gun system. Subsequent 37-mm gun firings designed to investigate the feasibility of achieving the same results using a HAN-based propellant (XM46) were performed. Results of these tests indicated that XM46 is more difficult to ignite in this system than OTTO II monopropellant. This report describes the system configuration and test results which exploited segmented-chamber configurations to control the combustion evolution and ballistic stability in the 37-mm gun using OTTO II monopropellant. Test results using XM46 in the same configuration are presented and future plans are discussed.				
14. SUBJECT TERMS  liquid propellant guns, interior ballistics, bulk loaded, segmented chamber			15. NUMBER OF PAGES 39	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK

## ACKNOWLEDGEMENTS

The authors would like to thank Mr. Robert P. Kaste of the U.S. Army Research Laboratory (ARL) for his technical assistance in ballistics and mechanical engineering support. Much appreciation is also extended to Mr. James DeSpirito of the U.S. Army Research Laboratory and Mr. Robert Talley of Veritay Technology, Inc. for their many technical suggestions and for reviewing this report.

Accession For	
NTIS CRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

INTENTIONALLY LEFT BLANK

## TABLE OF CONTENTS

	ACKNOWLEDGEMENTS.....	iii
	LIST OF FIGURES.....	vii
	LIST OF TABLES.....	ix
1.	INTRODUCTION.....	1
2.	METHODOLOGY.....	2
3.	EXPERIMENTAL.....	3
3.1	Gun System.....	3
3.2	Propellant.....	4
3.3	Igniter.....	5
3.4	Chamber Inserts.....	6
3.5	Instrumentation.....	9
3.6	Simple Cylindrical Chamber Insert Tests.....	10
3.7	Simple Segmented-Chamber Insert Tests.....	12
3.8	Transitioned Segmented-Chamber Insert Tests.....	15
3.9	XM46 Propellant Tests.....	18
4.	CONCLUSIONS.....	21
5.	REFERENCES.....	23
	DISTRIBUTION LIST.....	27

INTENTIONALLY LEFT BLANK



## LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1. 37-mm Gun Used for Segmented-Chamber BLPG Testing.....	4
2. Piston Radial Igniter and Stub Case Adaptor.....	5
3. Chamber Insert Configurations. (a) Simple Cylindrical Chamber Insert, (b) Simple Segmented-Chamber Insert, and (c) Transitioned Segmented-Chamber Insert.....	7
4. Initial System Configuration.....	8
5. System Configuration After Insertion of Breech Face Insert and Donut of Solid Propellant.....	9
6. Pressure Transducer Port Locations.....	10
7. Simple Cylindrical Chamber Insert Test Results.....	11
8. Simple Cylindrical Chamber Insert Test Results Compensated for Ignition Delay.....	12
9. Simple Segmented-Chamber Insert Test Results.....	13
10. Simple Segmented-Chamber Insert Test Results Compensated for Ignition Delay.....	14
11. Simple Segmented-Chamber Insert Test Results Compensated for Ignition Delay Plotted Without Round 9.....	14
12. Transitioned Segmented-Chamber Test Results.....	16
13. Transitioned Segmented-Chamber Test Results Compensated for Ignition Delay.....	16
14. Comparison of Pressure-Time Histories for Simple Cylindrical, Simple Segmented, and Transitioned Segmented-Chamber Inserts.....	18
15. Example of Poor Ignition of XM46 in a BLPG.....	19
16. Comparison of Pressure-Time Histories for a 20-mm BLPG Using OTTO II Monopropellant and XM46.....	20

INTENTIONALLY LEFT BLANK

## LIST OF TABLES

<u>Table</u>	<u>Page</u>
1. Properties of Candidate Liquid Propellants.....	5
2. System Parameters for Simple Cylindrical Chamber Insert Test Series...	10
3. Performance Comparison for Simple Cylindrical Chamber Insert Test Series.....	12
4. System Parameters for Simple Segmented-Chamber Insert Test Series..	13
5. Performance Comparison for Simple Segmented-Chamber Insert Test Series.....	15
6. System Parameters for Transitioned Segmented-Chamber Insert Test Series.....	16
7. Performance Comparison for Transitioned Segmented-Chamber Insert Test Series.....	17

INTENTIONALLY LEFT BLANK

## 1. INTRODUCTION

The Bulk-Loaded Liquid Propellant Gun (BLPG) concept remains attractive to today's Army because it offers the advantages of any liquid propellant (LP) system, including: improved efficiency in the logistics chain, decreased cost of propellant production, reduced system vulnerability, and an opportunity for higher charge loading densities (Morrison, Knapton, and Bulman 1988). Perhaps more importantly, it also adds mechanical simplicity when compared to the regenerative liquid propellant gun (RLPG) system (Pate and Magoon 1985; Mandzy et al. 1983; Magoon, Haberl, and Purtee 1989; Mandzy, Cushman, and Magoon 1987). However, the BLPG has a long history of performance variability, including numerous overpressures and system failures. The basic problem is that the combustion process depends on hydrodynamic instabilities rather than on a preformed propellant geometry to define burning surface. Morrison, Knapton, and Bulman (1988) found that small differences in ignition stimulus, initial ullage, or shot start pressure may influence these instabilities in such a way as to amplify their influence tremendously on the combustion process and the overall ballistic event. This reference gives an excellent historical overview of LP guns and summarizes the traditional understanding of the BLPG processes. In addition it offers an extensive bibliography of BLPG research.

One approach to overcome the traditional BLPG problem is to develop the methodology that reduces the amplification of the early instabilities and hence makes the system tolerant of minor, yet unavoidable, variations in initial conditions. To this end, a program was initiated at the Army Research Laboratory (ARL) to investigate the use of segmented-chamber configurations to control the ballistic variability in BLPGs. A series of gun firings were performed in a 37-mm BLPG using OTTO II monopropellant. Results of these tests indicate that a piston radial igniter and a solid propellant booster with various segmented-chamber concepts are favorable in controlling the combustion evolution and ballistic stability in this gun system. Subsequent 37-mm gun firings designed to investigate the feasibility of achieving the same results using a hydroxylammonium nitrate (HAN)-based propellant (XM46) were performed. Results of these tests indicated that XM46 (previously designated LGP 1846) is more difficult to ignite in this system than OTTO II monopropellant. This report describes the system configuration and test results that made use of segmented-chamber configurations to control the combustion evolution and ballistic stability in the 37-mm gun using OTTO II monopropellant. Test results using XM46 in the same configuration are also presented and future plans are discussed.

## 2. METHODOLOGY

A typical BLPG system has often been characterized in literature as consisting of a near-bore diameter cylindrical combustion chamber, a projectile seated at the forward end of the combustion chamber just inside the barrel, and an igniter at the breech. This classical BLPG configuration features the utmost in mechanical simplicity but offers few means to control and stabilize the ignition and combustion processes and the associated fluid dynamics and combustion instabilities characteristic of BLPGs (Comer, Shearer, and Jones 1963). Unlike the solid propellant combustion process in which the burning rate depends on a predefined propellant geometry to determine burning surface and progressivity, the ignition and combustion process of LP is initially characterized by the growth and geometry of an ignition bubble and combustion gas cavity (Comer 1976), analogous to the motion of a gas cavity in a gravitational field (Davies and Taylor 1950; Taylor 1950). After this cavity reaches the projectile base, an annulus of liquid remains on the chamber walls. Combustion gases flowing at high velocities through this annulus results in turbulent mixing of the liquid and gas at the inner surface of the annulus. This turbulent mixing is commonly referred to as the Helmholtz instability (Helmholtz 1868). These instabilities may grow and cause some of the liquid to break off and form droplets, which drastically changes the amount of surface area available for combustion, causing poor system repeatability. It has been experimentally demonstrated that small differences in ignition stimulus, initial ullage, or shot start pressure may influence these instabilities in such a way as to amplify their influence on the combustion process and the overall ballistic event (Morrison, Knapton, and Bulman 1988).

As mentioned in the introduction, a general approach to overcome the traditional BLPG instability problems is to develop a methodology to reduce the amplification of the early instabilities and hence make the system tolerant of minor, yet unavoidable, variations in initial conditions. The approach presented in this report is to segment the combustion chamber into several smaller subchambers in an effort to decrease the amplification of the instabilities, and thereby control ballistic variability in BLPGs. The premise for segmenting the combustion chamber is that random variations occurring in the subchambers will cancel, or at least not reinforce one another, significantly reducing the overall system sensitivity to minor variations in initial conditions. In addition, the added boundary conditions due to the many subchambers may provide needed preformed surface area to allow the propellant to burn more uniformly. This concept is based on a United States patent entitled "Combustion Sub-channels for

Bulk-Loaded Liquid," which asserts that "the gas and pressure produced in each sub-chamber will be ejected into the common volume located forward of their open ends and aft of the projectile base, where their individual contribution to the propelling pressure will be summed, and their variations averaged" (Puckett 1990). The patent was a conceptual one that offered no experimental data in support of the assertion. For comparison, various small-caliber BLPG systems have been developed ( $\leq 7.62$  mm) that exhibit acceptable performance and repeatability, but only for small firing groups under controlled laboratory conditions (Knapp, Stobie, and Comer 1976).

A study of literature yielded very little information concerning past attempts to experimentally explore the segmented-chamber concept. Redel Inc. (1956) briefly described an attempt to use a "four-holed honeycomb" in a 20-mm BLPG. The pressure-time curve exhibited the elimination of the traditional double hump, but they were unable to draw any conclusions from the single test. No further details or investigations were discussed. Gemershausen, Schmitt, and Reinelt (1986) discussed segmentation of the igniter cavity region, however, the combustion chamber was configured in the traditional BLPG fashion. As with the case of the 20-mm "honeycomb" chamber, no significant developments were noted. Based upon the apparent lack of a thorough evaluation of the concept, the ARL began an experimental program to investigate the assertion that segmenting the combustion chamber of a BLPG will control the variabilities in the ballistic process (Talley and Owczarczak 1992).

### 3. EXPERIMENTAL

3.1 Gun System. Testing of the segmented-chamber BLPG concept was performed in a 37-mm antitank gun, designated M3 in the Army inventory. A sketch of the gun chamber is shown in Figure 1. The chamber has a chambrage region as shown in the figure. The gun tube consists of 12 equally spaced, right-hand lead grooves with 48 calibers of travel. This weapon was chosen because it offered sufficient chamber volume to allow effective segmentation while at the same time facilitating testing with a reasonable projectile mass and propelling-charge-to-mass ratio (projectile mass = 447 g, C/M = 0.33). In addition, it was also convenient because it had a sliding breech mechanism that allowed easy loading of the round. However, one major drawback was the maximum pressure envelope safety rating of 450 MPa, which was based on a soldier standing behind the weapon and pulling a lanyard. Given the ratio of the outside-to-inside diameter of the combustion chamber, it was decided that the pressure

envelope could be extended to nearly 550 MPa without damage to the weapon. Since these studies were to be performed at a relatively low performance level and were designed to establish the merits of the segmented-chamber concept, the investigators deemed the fixture acceptable for testing.

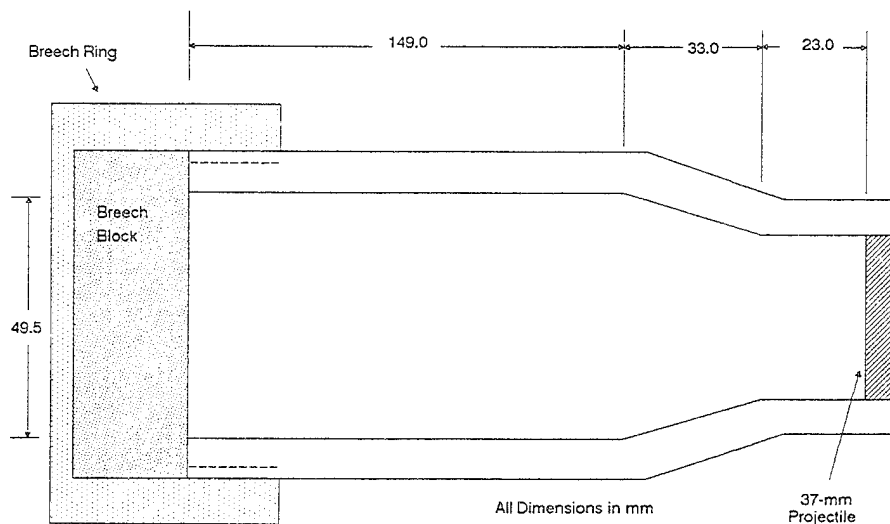


Figure 1. 37-mm Gun Used for Segmented-Chamber BLPG Testing.

**3.2 Propellant.** OTTO II monopropellant was chosen as the LP for testing. The decision to use OTTO II monopropellant was based on the realization that this propellant is easier to ignite than other candidate propellants (Travis, Knapton, and Morrison 1986) and seems to be less prone to excessive pressures. The thermochemical properties of OTTO II monopropellant are given in Table 1 along with those of XM46, which are included for comparison purposes. It was planned that later tests, pending an evaluation of the tests with OTTO II monopropellant, would be performed with XM46.



Table 1. Properties Of Candidate Liquid Propellants.

LP	Composition			Density (g/cc)	Impetus (J/g)	Flame Temp. (K)	Gamma
	Fuel (%Wt.)	Oxidizer (%Wt.)	Diluent (%Wt.)				
OTTO II	1,2 Dinitroxypropane (76)	Di-N-butyl sebacate (22.5)	2 nitrodiphenylamine (1.5)	1.23	866	1,986	1.266
XM46	TEAN (19.2)	HAN (60.8)	Water (20)	1.43	898	2,469	1.223

3.3 Igniter Three main attributes were identified that an igniter needed to have to be acceptable for our study. The first requirement was that the igniter be one that had been experimentally demonstrated to ignite LP reliably in a medium-caliber BLPG. The second, and most important, was that it should be capable of igniting the LP in each of the subchambers simultaneously. The third, although not a necessity, was that the pressure rise rate be much slower than a traditional BLPG rise rate, yet strong enough to reliably ignite the LP. Knapton and Stobie (1979) had demonstrated the use of a piston radial igniter in effectively igniting NOS-365 propellant. Figure 2 shows a drawing of the piston radial igniter and stub case adapter. The stub case adapter replaces the case base of a standard solid propellant round and is used to house the M52A3B1 electrical primer as well as the piston radial igniter.

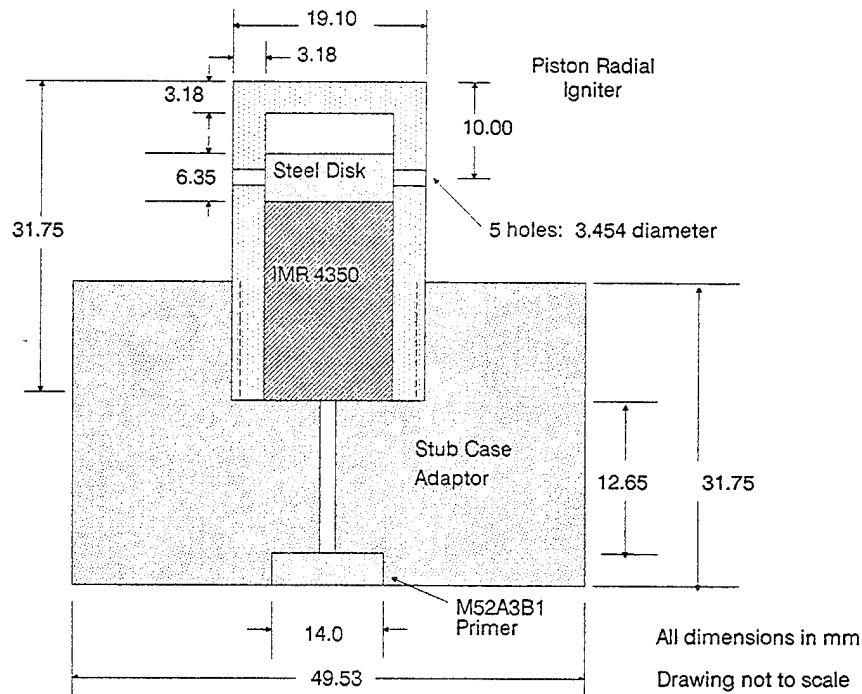


Figure 2. Piston Radial Igniter and Stub Case Adaptor.

Under initial conditions a circular steel disk covered with a silicon rubber sealed each of the five holes in the body of the igniter. IMR 4350 single-perforation solid propellant was loaded into the free volume of the igniter, which was then screwed into the stub case adaptor. Upon initiation of the M52A3B1 electrical primer, the hot gases from the M52A3B1 ignite the IMR 4350. This event forces the steel disk forward, uncovers the igniter vent holes, and simultaneously vents hot gases from the igniter radially into the combustion chamber. The piston radial igniter was chosen over an axial igniter because it was deemed more likely to ignite all the subchambers uniformly. This igniter met all of the criteria outlined previously except for the lower pressure rise rate. The free volume in the igniter, including the vent hole from the M52A3B1 to the IMR 4350, is 2.17 cc before the movement of the piston, and 2.46 cc after the piston has come to rest. Therefore, for loading density calculations in the piston radial igniter, a volume of 2.46 cc was used. Open-air tests were performed, and high-speed photography (7,000 frames per second) was used to demonstrate the uniform venting characteristics of the igniter. Based on these tests, it was felt that the igniter would satisfy the first two requirements outlined previously. The third requirement will be addressed later in this report.

3.4 Chamber Inserts . The manner chosen to effect the chamber segmentation was through the use of nylon chamber inserts (Talley and Owczarczak 1992). Figure 3 shows the three designs used (drawings not to scale). Figure 3a shows a simple cylindrical chamber insert designed to allow baseline testing of a traditional BLPG system. The primary purpose of this insert was to provide a baseline for performance comparisons with the segmented-chamber designs and to demonstrate whether segmenting the chamber of a BLPG changed the interior ballistic process. The insert was designed to allow the same propellant volume (29 cc) as the segmented-chamber designs shown in Figures 3b and 3c. Figure 3b shows a simple segmented-chamber design consisting of three holes of equal diameter in the nylon insert. Figure 3c shows a transitioned segmented-chamber design that was angled at the igniter end in an effort to more efficiently couple the igniter gases to each of the subchambers simultaneously.

Figure 4 shows a drawing of the system configuration with the simple cylindrical insert in the chamber. As can be seen in the figure, the insert stops at the chambrage region and does not extend to the base of the projectile. The purpose for this design feature was to ensure a stationary boundary during early combustion and to eliminate the possibility that the insert would be forced down the gun tube during firing. The goal was to impart all of the system

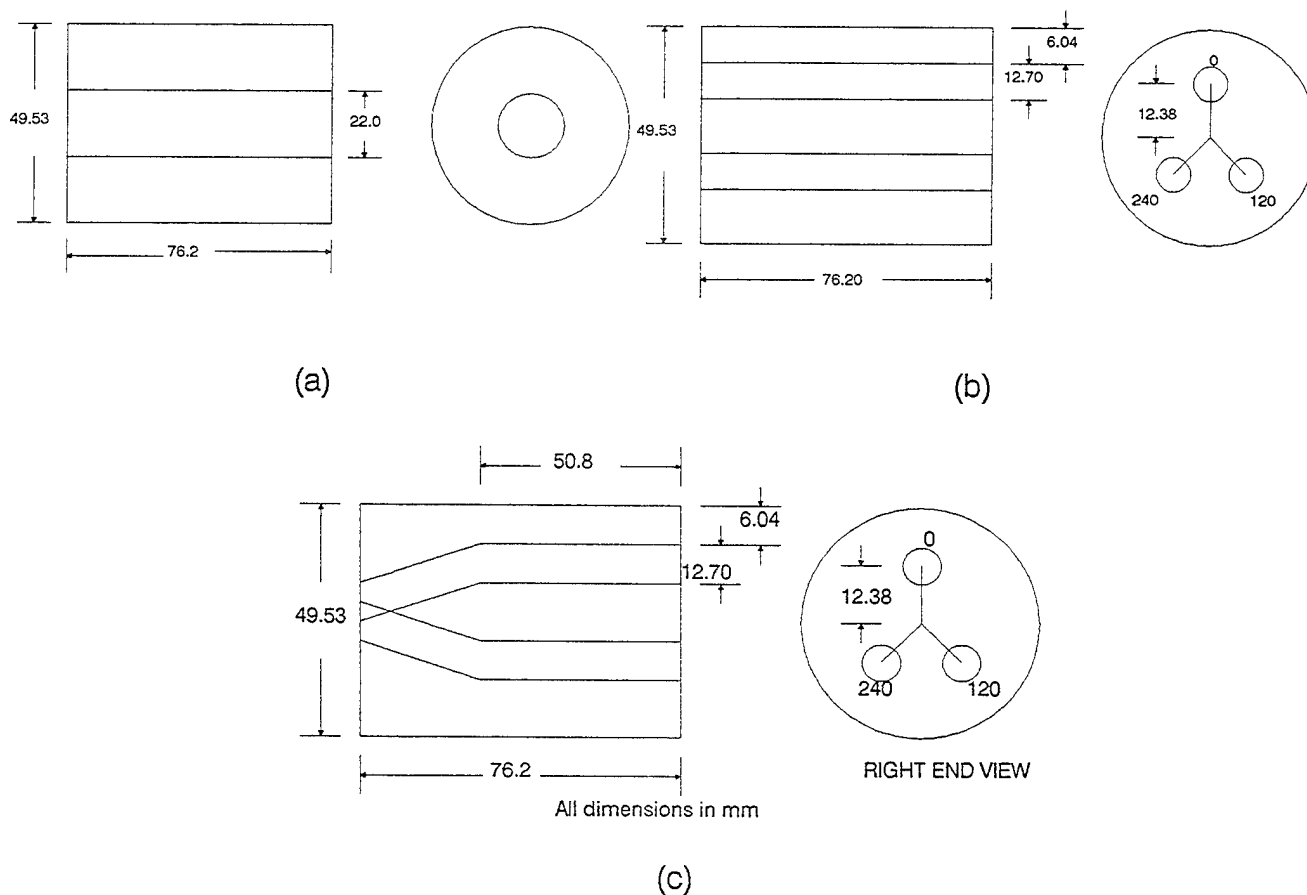


Figure 3. Chamber Insert Configurations. a) Simple Cylindrical Chamber Insert, b) Simple Segmented-Chamber Insert, and c) Transitioned Segmented-Chamber Insert.

energy on the base of the projectile and eliminate any possibility of doing work on the chamber insert. At the igniter end, a practical implication of using a chamber insert to segment the chamber becomes apparent. It appears that one could extend the simple cylindrical chamber insert to the rear of the chamber. However, since the relatively large piston radial igniter would prohibit this with the segmented-chamber inserts, it was not done for the baseline configuration shown. There was a relatively large volume (58 cc) in the rear of the chamber that was empty. It was deemed undesirable to fill this area with LP because of the large step function when transitioning forward into the chamber insert; therefore we needed to fill at least a portion of this volume. In studies performed by Knapton and Stobie (1979) and Knapton et al. (1978), it was demonstrated that placing a Breech Face Insert (BFI) at the rear of the chamber decreased the maximum chamber pressure in 38.8-mm BLPG firings. By placing a BFI at the rear of the chamber, a portion of this volume could be eliminated. However, the size of the BFI was limited

by the venting process of the piston radial igniter and only eliminated 10 cc of the free volume, leaving 48 cc of open air volume.

Earlier in this report, three requirements for an igniter were outlined. The first two (reliability and uniform ignition) were addressed at that time and the third was left until now. It was desirable for the early pressure rise rate to be much more gentle than that of a traditional BLPG pressure-time profile. It was expected that if one were to place a donut of solid propellant booster charge in the open volume at the rear of the chamber, the igniter would then vent into solid propellant, providing a much more gentle pressure rise rate and in effect allowing a great deal more control over the early portion of the ballistic cycle. The unknown effect was how well the large solid propellant igniter would couple to the LP charge in the forward portion of the chamber. The insertion of this solid propellant donut into the open air volume in the rear of the chamber proved to be very advantageous. Figure 5 shows the system configuration after the insertion of the BFI and the donut of solid propellant. Note that a paper diaphragm is used to keep the LP contained in the insert and forward chambrage region. The total amount of LP used is approximately 124 cc.

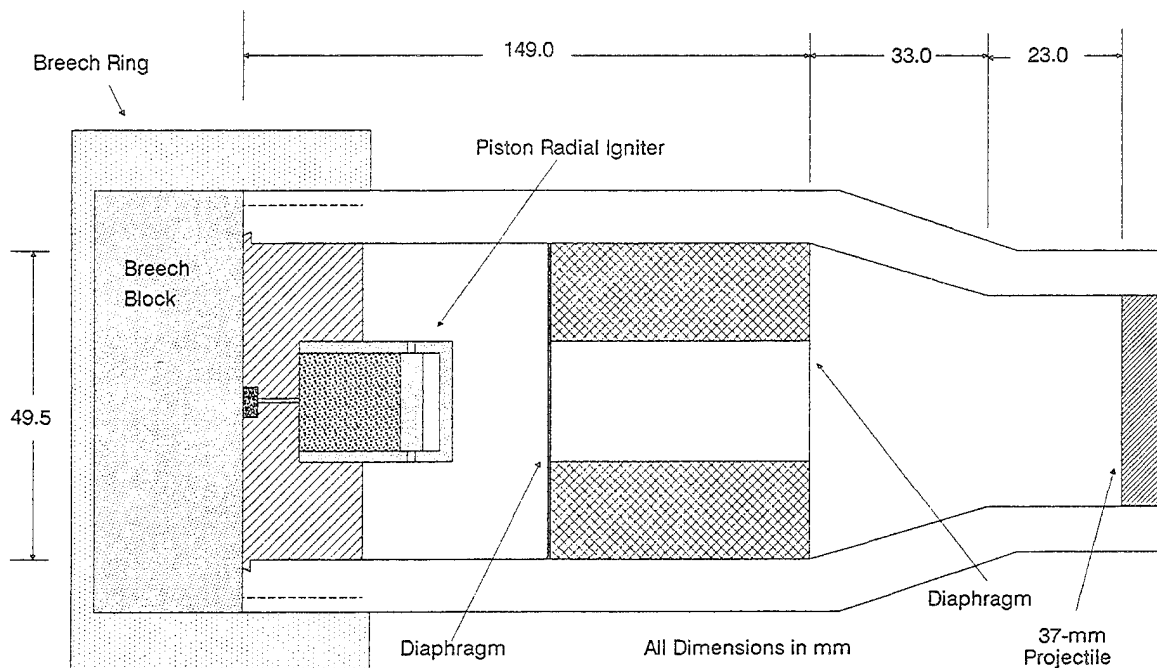


Figure 4. Initial System Configuration.

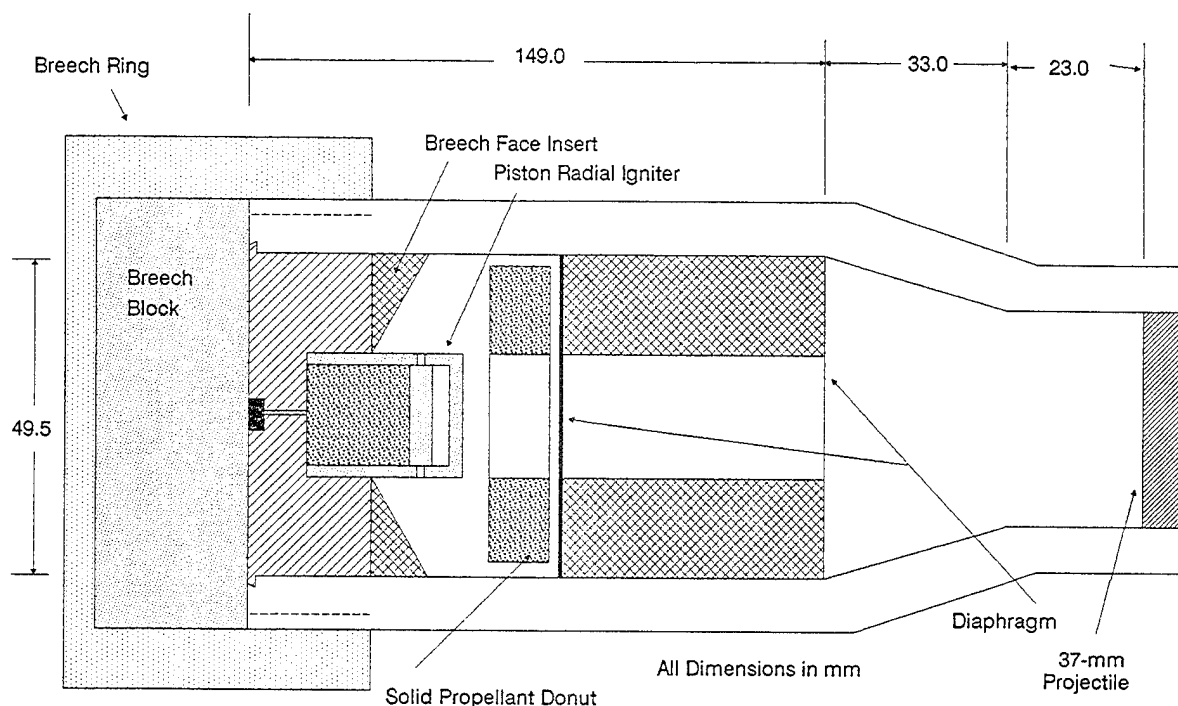


Figure 5. System Configuration After Insertion of Breech Face Insert and Donut of Solid Propellant.

**3.5 Instrumentation.** Pressure measurements were taken in the fixture using Kistler 607C4 piezoelectric pressure transducers at the locations noted in Figure 6. It was not possible to measure the pressure at the igniter end of the chamber because of the manner in which the breech ring of the weapon attached to the chamber. Pressure ports P1 and P2 were covered by the chamber insert and, subsequently, a hole 3.175 mm in diameter was drilled in the insert and was filled with grease to prohibit LP from leaking out of the insert. P3 was located at the top of the chambrage and was used as the port through which the LP was loaded into the chamber. A syringe was used to inject the LP. As the LP was injected, the air in the chamber was displaced back through the pressure port. Once full, a cotton swab was used to clean excess LP out of the pressure port. A 35-GHz microwave interferometer was used to measure projectile displacement and processed in real time to obtain a projectile muzzle velocity (Rosenberger and Martz 1992). For each cycle of the interferometer, the projectile moved 4.226 mm. The muzzle velocity was verified using a series of break screens, located 3.5 m to 7.5 m from the muzzle of the gun, and counters to measure the time of projectile passage.

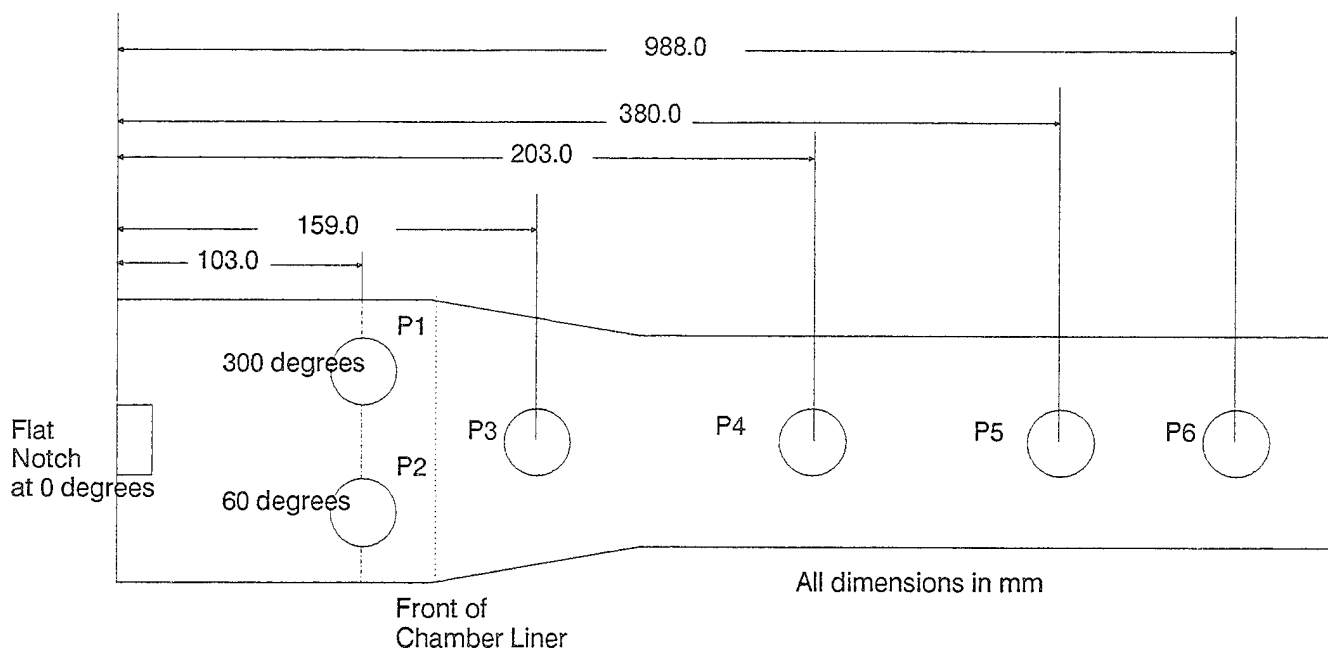


Figure 6. Pressure Transducer Port Locations.

3.6 Simple Cylindrical Chamber Insert Tests. Three rounds were fired using the simple cylindrical chamber insert shown in Figure 3a. System parameters for each of the three rounds are shown in Table 2. The projectile was then loaded into the gun followed by the simple cylindrical chamber insert, which had a paper diaphragm at the igniter end of the insert. LP was then injected into the chamber using a syringe as described earlier. In each case, a bead of silicone sealant was placed around the rotating band of the projectile to act as a low-pressure seal to keep the LP from leaking around the projectile. Once positive assurance of no leaks was obtained by inspecting the rear chamber and the projectile-barrel interface, the solid propellant donut booster charge, BFI, igniter, and stub case were inserted into the chamber and the breech was closed.

Table 2. System Parameters for Simple Cylindrical Chamber Insert Test Series.

Round No.	LP	LP Volume (cc)	LP Mass (g)	Projectile Mass (g)	Propellant Mass in Igniter (g)	Propellant Mass in Booster (g)
5	OTTO II	123	151.3	457	0.8063	15.2
6	OTTO II	123	151.3	457	0.8046	15.2
7	OTTO II	123	151.3	457	0.8077	15.2

Figure 7 shows the pressure-time results from the P3 pressure location (just forward of the insert). As can be seen from the figure, the ignition delays, as referenced from the time the electrical energy is delivered to the M52A3B1 primer, vary as much as 12 ms. However, if the pressure-time curves are plotted without consideration to the ignition delay, as in Figure 8, they overlay quite nicely. The reason for the delay is believed to be the large air volume in the rear of the charge, or the tissue that is used to contain the IMR 4350 solid propellant donut. As can be seen from the figure, the solid propellant, responsible for the initial pressure rise, couples quite well to the LP as is evident by the reproducible rise rate of the pressure-time curves. In addition, the curves exhibit the double hump of a traditional BLPG pressure-time curve; however they appear to be uncharacteristically well behaved. It should be noted here that the double-humped behavior exhibited in BLPGs is typically not repeatable because it is thought that it is generated, at least in part, by Helmholtz mixing and is thought to be responsible for variability in ballistic performance. To gain control of the BLPG ballistic process, it will be necessary to further understand the genesis and evolution of the double hump. Table 3 shows a performance comparison for the three shot series using the simple cylindrical chamber insert. This series was used as a baseline for comparison with the segmented-chamber tests.

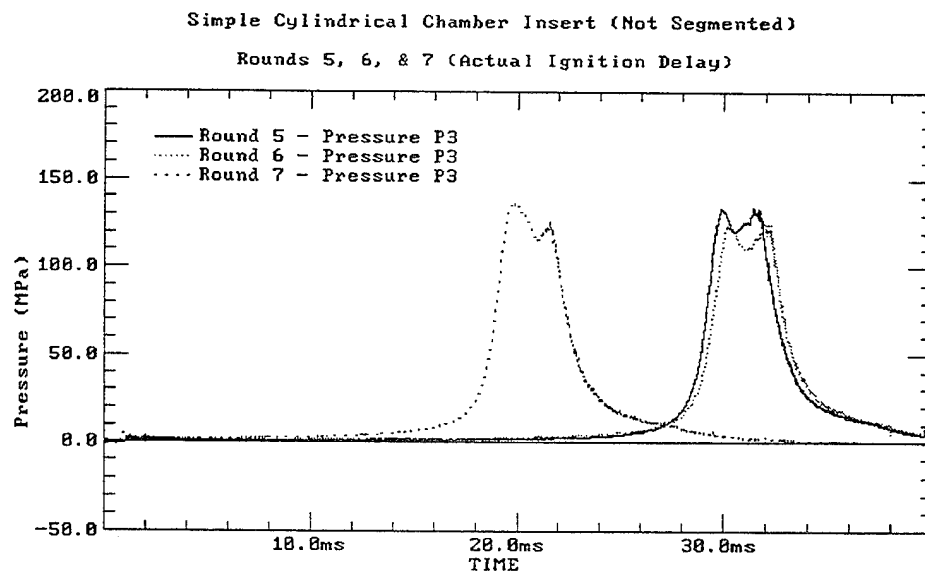


Figure 7. Simple Cylindrical Chamber Insert Test Results.

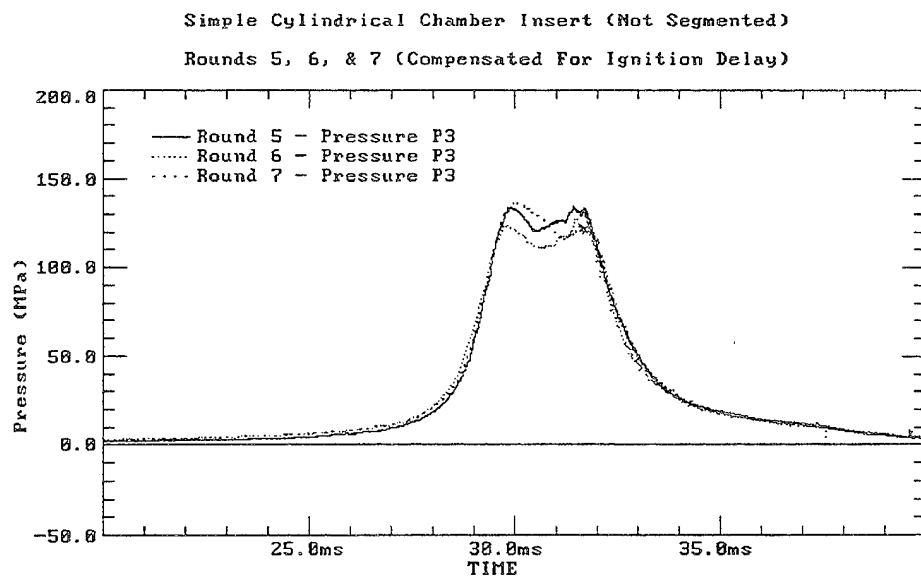


Figure 8. Simple Cylindrical Chamber Insert Test Results Compensated for Ignition Delay.

Table 3. Performance Comparison for Simple Cylindrical Chamber Insert Test Series.

Round No.	Maximum Chamber Pressure - P3 (MPa)	Velocity (m/s)
5	133	800
6	124	778
7	136	801
Average	131	793
Standard Deviation	6.2 (4.8%)	13.0 (1.6%)

**3.7 Simple Segmented-Chamber Insert Tests.** A total of four rounds were fired using the simple segmented-chamber insert shown in Figure 3b. System parameters for each of the four rounds are shown in Table 4. In each case, both the round and the charge were loaded in exactly the same manner as in the case of the simple cylindrical chamber insert tests. Pressure-time curves for each of the four rounds are shown in Figure 9. As can be seen from the figure, Round 09 was an outlier that displayed not only a much longer ignition delay, but also evidence of a higher chamber pressure. There was evidence of a possible leak in the chamber upon inspection of the fixture after the test, but no conclusive reason could be found to explain the results. However, if we again plot the pressure-time curves without consideration



for the time delay, the early portion of the curves overlay, including the outlier, as shown in Figure 10. If we eliminate Round 09, the curves overlay reasonably well up to maximum pressure as shown in Figure 11. Another important feature that the plots exhibit is that the shape of the curve at peak pressure is slightly different from that of the simple cylindrical chamber insert tests. The segmented-chamber insert has had the effect of lessening the degree of the double hump at peak pressure. As seen in Table 5, the performance parameters compare fairly well for a nonoptimized system, except for Round 09. When comparing the performance data to that of the simple cylindrical chamber firings shown in Table 3, the performance of the two systems is nominally the same.

Table 4. System Parameters for Simple Segmented-Chamber Insert Test Series.

Round No.	LP	LP Volume (cc)	LP Mass (g)	Projectile Mass (g)	Propellant Mass in Igniter (g)	Propellant Mass in Booster (g)
8	OTTO II	124	152.5	457	0.7996	15.2
9	OTTO II	127	156.2	457	0.8005	15.2
10	OTTO II	128	157.4	457	0.8016	15.2
11	OTTO II	120	147.6	457	0.8036	15.2

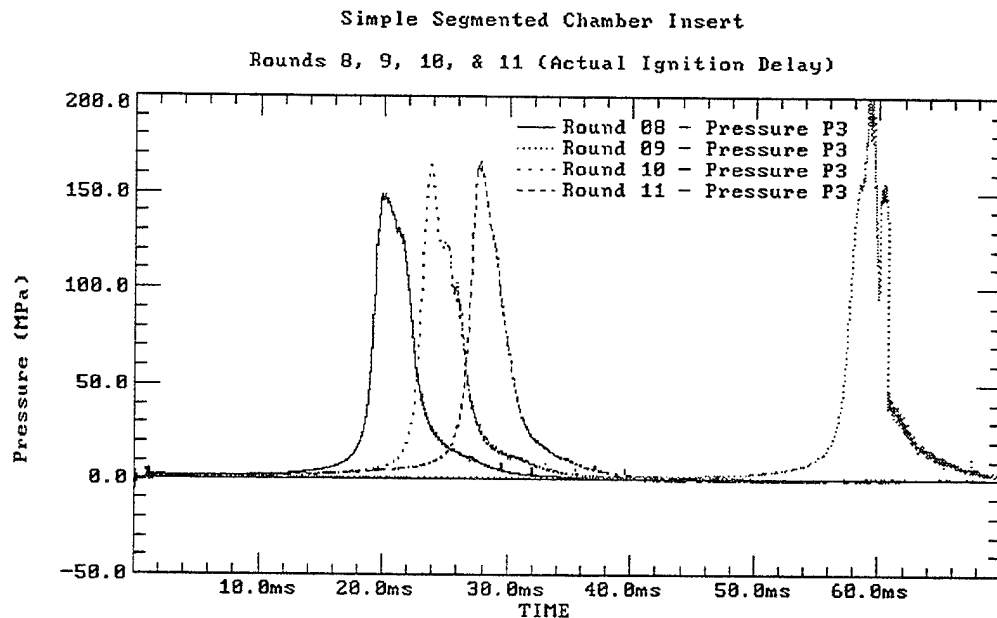


Figure 9. Simple Segmented-Chamber Insert Test Results.

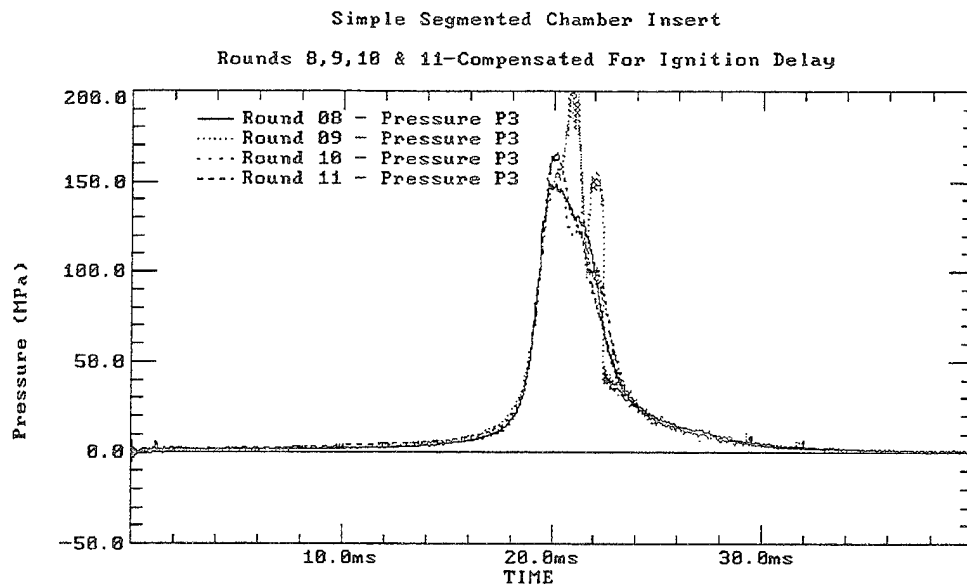


Figure 10. Simple Segmented-Chamber Insert Test Results Compensated for Ignition Delay.

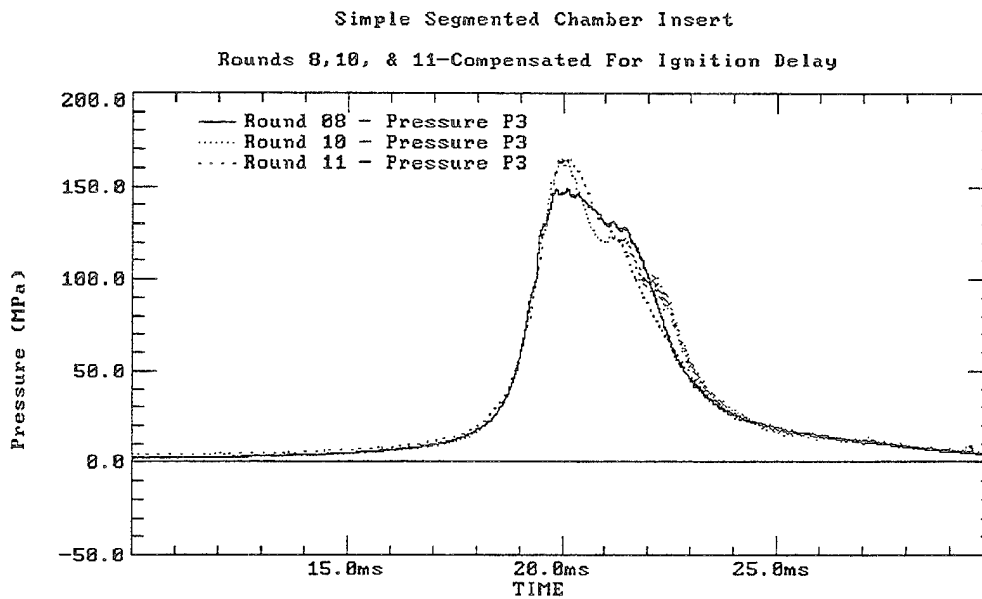


Figure 11. Simple Segmented-Chamber Insert Test Results Compensated for Ignition Delay Plotted Without Round 9.

Table 5. Performance Comparison for Simple Segmented-Chamber Insert Test Series.

Round No.	Maximum Chamber Pressure - P3 (MPa)	Velocity (m/s)
8	148	811
9	198	835
10	164	821
11	165	806
Average (8,9,10,11)	169	818
Standard Deviation (8,9,10,11)	21.0 (12.4%)	12.8 (1.6%)
Average (8,10,11)	159	813
Standard Deviation (8,10,11)	9.5 (6.0%)	7.6 (0.9%)

3.8 Transitioned Segmented-Chamber Insert Tests. Three rounds were fired using the transitioned segmented-chamber insert shown in Figure 3c. The subchambers were angled at the igniter end in an effort to more closely couple the igniter gases to each of the subchambers. System parameters for each of the three rounds are shown in Table 6. In each case, both the round and the charge were loaded in exactly the same manner as in the case of the previous two test series. Figure 12 shows the pressure-time curves for each of the three rounds. Once again, the ignition delay varies by the same magnitude as previous designs. As expected, when the pressure-time curves are plotted without consideration for the time delay, the early portions of the curves overlay as shown in Figure 13. Another important feature that the plots exhibit is that the shape of the curve at the peak is again slightly different than that of both the simple cylindrical chamber insert tests and the simple segmented-chamber insert tests. The transitioned segmented chamber insert has had the effect of nearly eliminating the double hump at peak pressure. As seen in Table 7, the performance parameters compare fairly well for a nonoptimized system. When comparing the performance data to that of the simple cylindrical chamber insert firings shown in Table 3, and to those of the simple segmented-chamber insert firings shown in Table 5, the performance is again nominally the same.

Table 6. System Parameters for Transitioned Segmented-Chamber Insert Test Series.

Round No.	LP	LP Volume (cc)	LP Mass (g)	Projectile Mass (g)	Propellant Mass in Igniter (g)	Propellant Mass in Booster (g)
12	OTTO II	121	148.2	457	0.8016	15.2
13	OTTO II	124	152.5	457	0.8060	15.2
14	OTTO II	123	151.3	457	0.8033	15.2

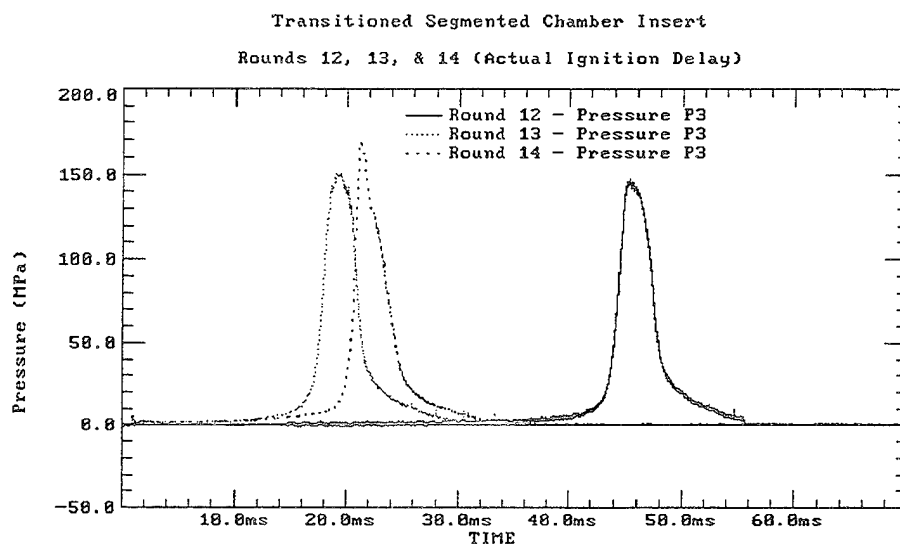


Figure 12. Transitioned Segmented-Chamber Test Results.

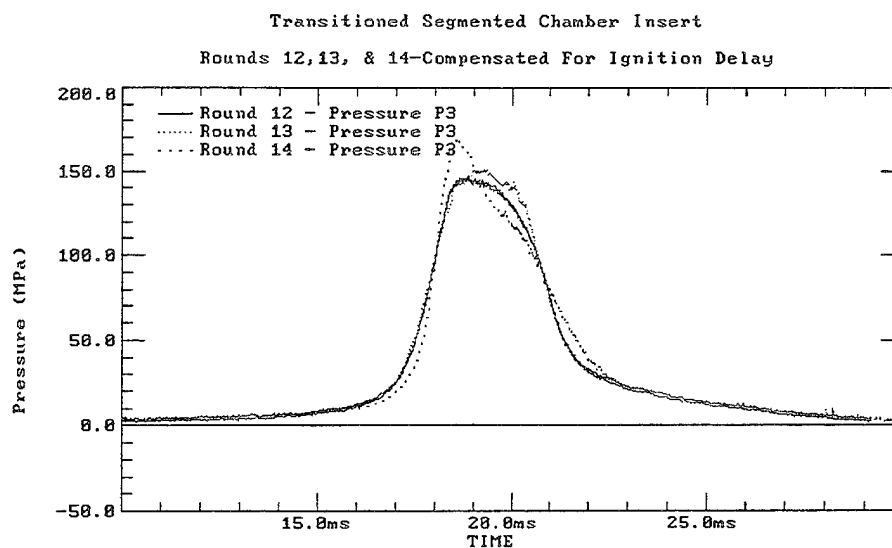


Figure 13. Transitioned Segmented-Chamber Test Results Compensated for Ignition Delay.

Table 7. Performance Comparison for Transitioned Segmented-Chamber Insert Test Series.

Round No.	Maximum Chamber Pressure - P3 (MPa)	Velocity (m/s)
12	146	758
13	150	818
14	169	809
Average	155	795
Standard Deviation	12.3 (7.9%)	32.6 (4.0%)

In each of the three configurations presented here, the coupling of the solid propellant to the LP was very smooth, and the subsequent rise to peak pressure compares quite well in all cases. As shown in Figure 14, the main difference in the pressure-time curve from one configuration to the next occurs at peak pressure. The simple cylindrical chamber configuration, the classical BLPG baseline, exhibited the classical double-humped pressure-time trace. The simple segmented configuration exhibited less of a double-humped pressure-time curve. In the case of the transitioned segmented configuration, the double-humped pressure-time curve was almost eliminated.

The reason for the variance in the pressure-time curve from one configuration to the next may prove critical to understanding the BLPG process. One possible explanation is that segmenting only the middle of the chamber allowed the segmented portion to act as a very high-pressure igniter. In each configuration, the volume in the nylon chamber insert was kept approximately the same. If one calculates the volume opened up behind the projectile due to the initial projectile travel up to the time of peak pressure (through the use of the microwave interferometer), it is about the same as the volume of the nylon chamber insert. It is speculated that a portion of the LP was ignited before the igniter gas plume blew through into the forward area of the chamber; which was the same configuration as the classic BLPG case. At this time, there is a slight drop in pressure due to the increased volume vacated by the projectile. Mixing occurs which is robust enough to smoothly burn the remainder of the LP. In the case of the segmented-chamber configurations, the propellant in the chamber insert burns more uniformly and initiates better mixing as the three high-pressure plumes blow into the forward portion of the chamber; resulting in a smoother pressure-time curve.

At this time not much more can be said concerning the effectiveness of the concept in controlling the ballistic variability in BLPGs. Based on the previous explanation, it is felt that by segmenting the entire chamber, more control could be achieved by eliminating the classical BLPG configuration in the forward portion of the chamber. It is evident from the consistency in the pressure-time curves to near-peak pressure that the solid propellant igniter allows a great deal of control and repeatability of the early combustion event. However, this does not assure repeatable ballistics based on the pressure-time curves later in the combustion process and the performance comparisons presented here. This supports an earlier postulate that repeatability of the igniter is a necessary, but not a sufficient condition to ensure stable ballistics (Knapton and Stobie 1979; Knapton et al. 1978).

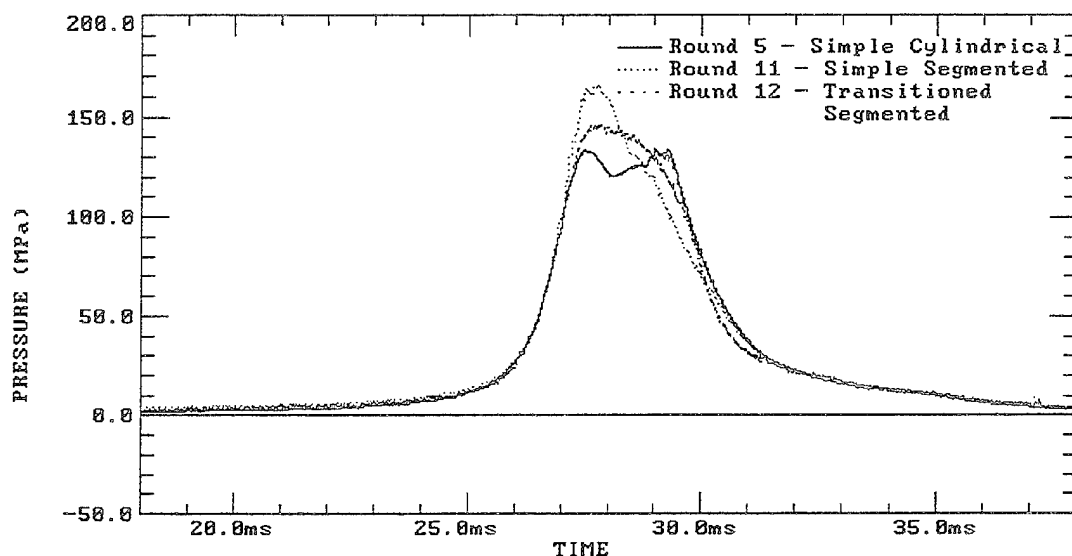


Figure 14. Comparison of Pressure-Time Histories for Simple Cylindrical, Simple Segmented, and Transitioned Segmented-Chamber Inserts.

**3.9 XM46 Propellant Tests.** The series of tests performed using OTTO II monopropellant demonstrated that segmenting the combustion chamber of a BLPG had noticeable effects on the ballistic process and that a reasonable level of control of the combustion process was achieved up to maximum pressure. Based on these rather encouraging results, we decided to evaluate the effects of the segmented-chamber concept using the HAN-based propellant XM46. As previously stated, XM46 has been demonstrated to be more difficult to ignite than OTTO II monopropellant and there was a great deal of concern that this would cause problems

with demonstrating the effectiveness of this system in XM46. The system configuration shown in Figure 5 was used with the simple cylindrical chamber insert to act as a baseline for future testing. Figure 15 shows the chamber pressure and microwave interferometer from this test.

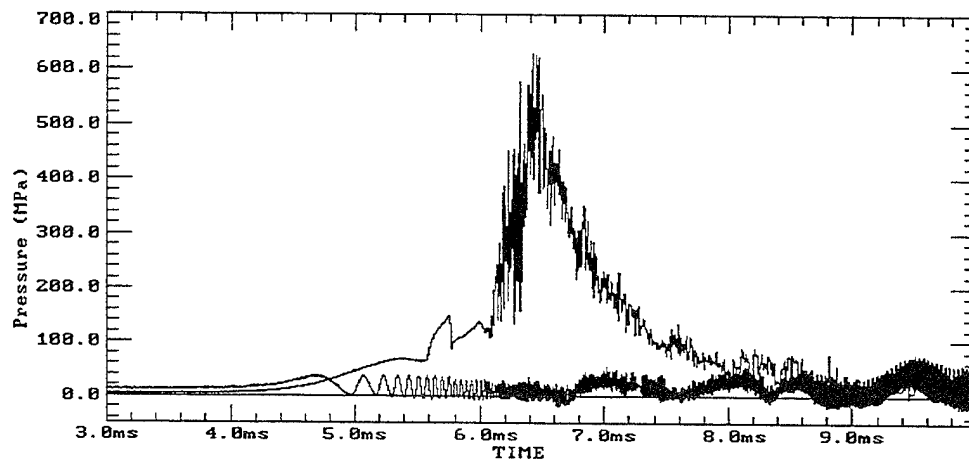


Figure 15. Example of Poor Ignition of XM46 in a BLPG.

As suspected, the ballistic process proved to be drastically different. The early pressure rise up to 20 - 30 MPa agrees quite well with that of earlier testing. However, XM46 proved much more difficult to ignite. As the pressure increased to about 60 MPa, a change in slope can be observed as if some amount of LP begins to burn. However, the pressure drops soon after increasing, suggesting either a lack of sustained combustion or that the gas generation rate can not keep up with the increasing volume caused by projectile motion. The sharp pressure excursion at about 5.7 ms is likely an artifact of the pressure measurement. As the LP blows through into the forward portion of the combustion chamber, mixing is not robust enough initially to burn the remainder of the propellant (5.6 ms - 6 ms). As mixing continues with undefined burning surface area, the condition required for the remainder of the bulk-loaded charge to ignite is reached, and it rapidly ignites. As in past bulk liquid propellant programs, the condition needed to initiate the XM46 in a controlled manner is not known. This test was repeated with similar results. Investigations are ongoing into system modifications to ignite XM46 in a controlled manner and maintain more stable ballistics.

The fact that the system configuration used quite successfully with OTTO II monopropellant does not exhibit stable ballistics when using XM46 is, to say the least, very interesting. In light of the very different chemical compositions of the two propellants, this may suggest that chemical kinetics plays a major role in the bulk-loaded LP burn process. At this time, this is only an observation, and nothing more can be said about the importance of chemical kinetics in bulk-loaded LP processes versus the role that hydrodynamics may play relative to the generation of surface area and subsequent gas generation rates.

The importance of an appropriate ignition system to the bulk-loaded LP process is well documented in literature. The data presented here support this assertion. Interestingly, recent work by Talley and Owczarczak (1992) at Veritay Technology Incorporated has shown that there is not much difference in the ballistics for a 20-mm BLPG gun firing using OTTO II monopropellant and for a 20-mm BLPG gun firing using XM46. Figure 16 shows a comparison of chamber pressure histories for a 20-mm BLPG firing using OTTO II monopropellant and XM46, respectively. Both tests were fired under the same system configuration using an axial igniter. For the most part, the two curves exhibit very similar behavior, unlike the data presented in this report for the two different propellants. These data, contrary to our tests, do not support the assertion that chemical kinetics plays a major role in the bulk-loaded LP burn process of a 20-mm BLPG. It is evident, however, that system parameters such as chamber volume, chamber L/D, and ignition configuration are key parameters for controlling the BLPG ignition and combustion processes.

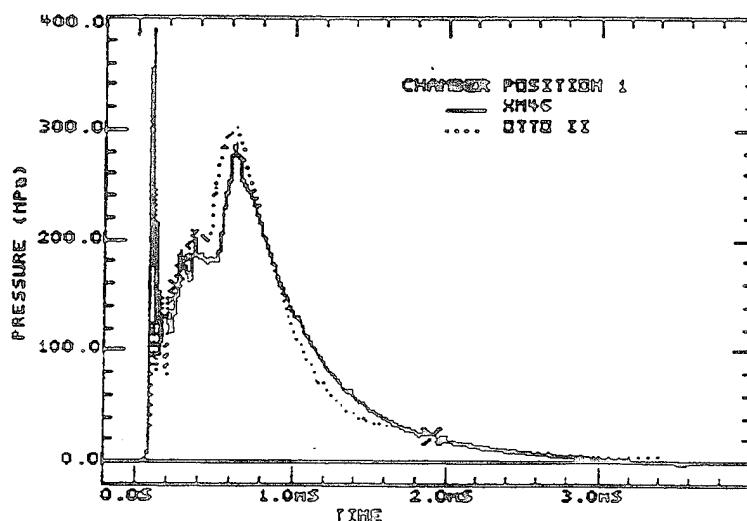


Figure 16. Comparison of Pressure-Time Histories for a 20-mm BLPG Using OTTO II Monopropellant and XM46.



#### 4. CONCLUSIONS

Based on the experimental data presented here, it is evident that segmenting the combustion chamber changed the combustion evolution of the 37-mm BLPG system when OTTO II monopropellant was used. The performance comparisons presented here show consistency on a shot-to-shot basis within a particular series. The pressure-time histories are reasonably well behaved for a nonoptimized system. Subsequent tests designed to investigate the feasibility of achieving the same result using XM46 indicated that XM46 is more difficult to ignite and therefore did not exhibit the same ballistic results. Data were presented which demonstrated comparable ballistic results when using OTTO II monopropellant and XM46 in a 20-mm BLPG ignited by an axial igniter. It was asserted that chemical kinetics may play a major role in the bulk-loaded LP burn process of the 37-mm BLPG system investigated. However, this does not agree with test results from the 20-mm BLPG configuration used by Talley and Owczarczak (1992) at Veritay Technology Incorporated.

Future testing in segmented-chamber BLPG technology will be continued at the ARL. The emphasis will be in the transition of the successful approaches presented here for OTTO II monopropellant to a system using XM46. Further, segmentation of the entire combustion chamber will be effected in an effort to control the ballistic process. A high-pressure fixture is being built to facilitate BLPG firings without the constraints of a restricted pressure envelope. Future tests will involve decreasing the size of the solid propellant booster, using faster burning solid propellants and higher igniter loading densities, to effect the segmented-chamber approach in a medium-caliber system using XM46. Alternative segmented-chamber configurations will also be explored.

INTENTIONALLY LEFT BLANK

## 5. REFERENCES

- Comer, R.H. "Ignition and Combustion of Liquid Monopropellants at High Pressure." Proceedings of the 16<sup>th</sup> International Symposium on Combustion, The Combustion Institute, Pittsburgh, PA, 1976, pp. 1211-1219.
- Comer, R.H., R.H. Shearer, and R.N. Jones. "Interior Ballistics of Liquid Propellant Guns." BRL-TR-1205, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, May 1963.
- Davies, R.M., and G.I. Taylor. "The Mechanics of Large Bubbles Rising Through Extended Liquids and Then Through Liquid in Tubes." Proceedings of the Royal Society, Series A, p. 200, London, England, 1950.
- Gemershausen, R., J. Schmitt, and K. Reinelt. "Method Of and Assembly for Firing Projectiles With Controlled Gasification of a Liquid Propellant." United States Patent 4,602,553, July 29, 1986.
- Helmholtz, H. "Monatsver." Berlin Academy, Berlin, Germany, 1868; reprinted in Philosophy Magazine, vol. 36, 1868.
- Knapton, J.D., and I.C. Stobie. "Conditions Required for Controlling Breech Pressure During a Bulk Loaded Liquid Propellant Gun Firing." CPIA Publication 308, vol. 4, pp. 51-66, 1979.
- Knapton, J.D., I.C. Stobie, and R.H. Comer. "A Review of Liquid Monopropellant Small Arms Ballistic Studies." BRL-MR-2579, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, January 1976.

- Knapton, J.D., I.C. Stobie, R.H. Comer, B.D. Bensinger, D. Henry, and L. Stansbury.  
"Charge Design Studies for a Bulk Loaded Liquid Propellant Gun." ARBRL-TR-02127,  
U.S. Army Research and Development Command, Aberdeen Proving Ground, MD,  
December 1978.
- Magoon, I., J. Haberl, and E. Purtee. "Preliminary Report on Test Firings of a 155-mm  
Regenerative Liquid Propellant Gun." CPIA Publication 529, vol. 3, pp. 243-251,  
October 1989.
- Mandzy, J., I. Magoon, W.F. Morrison, and J.D. Knapton. "Preliminary Report on Test  
Firings of a 105-mm Regenerative Fixture." CPIA Publication 383, vol. 2, pp. 161-172,  
October 1983.
- Mandzy, J., P.G. Cushman, and I. Magoon. "Technical Notes on Scaling Investigation of  
Concept VI." BRL-CR-580, U.S. Army Ballistic Research Laboratory, Aberdeen  
Proving Ground, MD, August 1987.
- Morrison, W.F., J.D. Knapton, and M.J. Bulman. "Liquid Propellant Guns." Gun  
Propulsion Technology. Edited by Stiefel. Vol. 109 of Progress in Astronautics and  
Aeronautics, AIAA, Washington, DC, ISBN 0-930403-20-7, 1988.
- Pate, R. and I. Magoon. "Preliminary Results from Ballistic Investigations in 30-mm  
Regenerative Liquid Propellant Gun Firings." CPIA Publication 432, vol. 2, pp. 213-224,  
October 1985.
- Puckett, L.C. "Combustion Sub-channels for Bulk Loaded Liquid." United States  
Patent 4,936,188, June 26, 1990.
- Redel Inc. "Investigation of Propellant Reactions for Liquid Propellant Gun Systems."  
Final Report APR-17, Contract NOrd 12148, Anaheim, CA, 28 April 1956.

- Rosenberger, T.E., and R.L. Martz. "A Method for the Real-Time Measurement of Projectile Inbore Velocity." BRL-TR-3407, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, September 1992.
- Talley, R.L., and J.A. Owczarczak. "Investigation of Bulk-Loaded Liquid Propellant Gun Concepts." Veritay Technology Incorporated Final Technical Report for Contract DAAA15-92-C-0018, 24 September 1992.
- Taylor, G.I. "The Instability of Liquid Surfaces When Accelerated in a Direction Perpendicular to Their Planes, I." Proceedings of the Royal Society, Series A; p. 201, 1950.
- Travis, K.E., J.D. Knapton, and W.F. Morrison. "Closed Chamber Tests on Liquid Propellants." BRL-TR-2755, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, September 1986.

INTENTIONALLY LEFT BLANK

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	ADMINISTRATOR DEFENSE TECHNICAL INFO CTR ATTN DTIC DDA CAMERON STATION ALEXANDRIA VA 22304-6145

1	DIRECTOR US ARMY RESEARCH LAB ATTN AMSRL OP SD TA 2800 POWDER MILL RD ADELPHI MD 20783-1145
---	---

3	DIRECTOR US ARMY RESEARCH LAB ATTN AMSRL OP SD TL 2800 POWDER MILL RD ADELPHI MD 20783-1145
---	---

1	DIRECTOR US ARMY RESEARCH LAB ATTN AMSRL OP SD TP 2800 POWDER MILL RD ADELPHI MD 20783-1145
---	---

ABERDEEN PROVING GROUND

5	DIR USARL ATTN AMSRL OP AP L (305)
---	---------------------------------------

NO. OF  
COPIES ORGANIZATION

1 CHAIRMAN  
DOD EXPLOSIVES SAFETY BD  
HOFFMAN BLDG 1 RM 856 C  
2461 EISENHOWER AVE  
ALEXANDRIA VA 22331-0600

1 HQS  
ATTN AMCICP AD M FISETTE  
US ARMY MATERIEL CMD  
5001 EISENHOWER AVE  
ALEXANDRIA VA 22333-0001

1 US ARMY BMDS CMD  
ADVANCED TECHLGY CTR  
PO BOX 1500  
HUNTSVILLE AL 35807-3801

1 OFC OF THE PRODUCT MGR  
ATTN SFAE AR HIP IP  
MR R DE KLEINE  
155MM HOWITZER M109A6 PALADIN  
PCNTY ARSNL NJ 07806-5000

3 PM  
ATTN SFAE ASM AF E  
LTC A ELLIS  
T KURIATA  
J SHIELDS  
ADV FIELD ARTLRY SYSTEM  
PCNTY ARSNL NJ 07801-5000

1 PM  
ATTN SFAE ASM AF Q W WARREN  
ADV FIELD ARTLRY SYSTEM  
PCNTY ARSNL NJ 07801-5000

1 CDR  
ATTN AMSMC PBM A SIKLOSI  
US ARMY ARDEC  
PROD BASE MODERNIZATION AGCY  
PCNTY ARSNL NJ 07806-5000

1 CDR  
ATTN AMSMC PBM E L LAIBSON  
US ARMY ARDEC  
PROD BASE MODERNIZATION AGCY  
PCNTY ARSNL NJ 07806-5000

NO. OF  
COPIES ORGANIZATION

1 PM  
ATTN AMCPM TMA  
PEO ARMAMENTS  
TANK MAIN ARMAMENT SYSTEM  
PCNTY ARSNL NJ 07806-5000

1 PM  
ATTN AMCPM TMA 105  
PEO ARMAMENTS  
TANK MAIN ARMAMENT SYSTEM  
PCNTY ARSNL NJ 07806-5000

1 PM  
ATTN AMCPM TMA 120  
PEO ARMAMENTS  
TANK MAIN ARMAMENT SYSTEM  
PCNTY ARSNL NJ 07806-5000

1 PM  
ATTN AMCPM TMA AS H YUEN  
PEO ARMAMENTS  
TANK MAIN ARMAMENT SYSTEM  
PCNTY ARSNL NJ 07806-5000

2 CDR  
ATTN SMCAR CCH V  
C MANDALA  
E FENNELL  
US ARMY ARDEC  
PCTNY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR CCH T L ROSENDORF  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR CCS  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR AEE J LANNON  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000



NO. OF  
COPIES ORGANIZATION

14 CDR  
ATTN SMCAR AEE B  
D DOWNS  
S EINSTEIN  
S WESTLEY  
S BERNSTEIN  
J RUTKOWSKI  
B BRODMAN  
P O'REILLY  
R CIRINCIONE  
P HUI  
J O'REILLY  
A BRACUTI  
D CHUI  
H KERWIN  
R KING  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

5 CDR  
ATTN SMCAR AEE WW  
M MEZGER  
J PINTO  
D WIEGAND  
P LU  
C HU  
US ARMY ARDEC  
PCTNY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR AES  
S KAPLOWITZ  
US ARMY ARDEC  
PCTNY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR HFM  
E BARRIERES  
US ARMY ARDEC  
PCTNY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR FSC G FERDINAND  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

NO. OF  
COPIES ORGANIZATION

1 CDR  
ATTN SMCAR FS T GORA  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

1 CDR  
ATTN SMCAR FS DH J FENECK  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

5 CDR  
ATTN SMCAR FSS A  
R KOPMANN  
B MACHEK  
S TRAENDLY  
C PERAZZO  
J PORTARO  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

4 CDR  
ATTN SMCAR FSN N K CHUNG  
A BAHIA  
R LEE  
A READDY  
US ARMY ARDEC  
PCNTY ARSNL NJ 07806-5000

3 DIR  
ATTN SMCAR CCB RA  
P O'HARA  
B PFLEGL  
SMCAR CCB S F HEISER  
BENET WEAPONS LABS  
WATERVLIET NY 12189-4050

2 CDR  
ATTN TECH LIB  
D MANN  
US ARMY RSRCH OFC  
PO BOX 12211  
RSRCH TRI PK NC 27709-2211

1 CDR  
ATTN ASQNC ELC IS L R MYER CENTER  
USACECOM  
R&D TECH LIB  
FT MONMOUTH NJ 07703-5301

NO. OF  
COPIES ORGANIZATION

1 CMTD  
ATTN AVIATION AGENCY  
US ARMY AVIATION SCHOOL  
FT RUCKER AL 36360

1 PM  
ATTN AMCPM ABMS T DEAN  
US TACOM  
WARREN MI 48092-2498

1 PM  
ATTN SFAE ASM BV  
US TACOM  
FIGHTING VEHICLE SYSTEMS  
WARREN MI 48397-5000

1 PM  
ATTN SFAE ASM AB  
ABRAMS TANK SYSTEM  
WARREN MI 48397-5000

1 DIR  
ATTN ATCD MA  
HQ TRAC RPD  
FT MONROE VA 23651-5143

1 DIR  
ATTN ATRC L MR CAMERON  
US ARMY TRAC FT LEE  
FT LEE VA 23801-6140

1 CMTD  
US ARMY CMD & GEN STAFF COLLEGE  
FT LEAVENWORTH KS 66027

1 CMTD  
ATTN REV AND TRNG LIT DIV  
US ARMY SPECIAL WARFARE SCHOOL  
FT BRAGG NC 28307

1 CDR  
ATTN SMCAR QA HI LIB  
RADFORD ARMY AMMUNITION PLANT  
RADFORD VA 24141-0298

NO. OF  
COPIES ORGANIZATION

1 CDR  
ATTN AMXST MC 3  
US ARMY FRGN SCIENCE & TECHLGY CTR  
220 SEVENTH STREET NE  
CHRLTTESVLE VA 22901-5396

1 CMTD  
ATTN ATSF CO MW E DUBLISKY  
US ARMY FIELD ARTLRY CTR & SCHOOL  
FT SILL OK 73503-5600

1 CMTD  
ATTN ATZK CD MS M FALKOVITCH  
US ARMY ARMOR SCHOOL  
ARMOR AGENCY  
FT KNOX KY 40121-5215

1 US ARMY RSRCH DEVELOPMENT  
& STD GROUP UK  
ATTN PSC 802 BOX 15  
DR ROY E RICHENBACH  
FPO AE 09499-1500

2 CDR  
ATTN SEA 62R  
SEA 64  
NAVAL SEA SYSTEMS CMD  
WASH DC 20362-5101

1 CDR  
ATTN AIR 954 TECH LIBRARY  
NAVAL AIR SYSTEMS CMD  
WASH DC 20360

4 CDR  
ATTN TECHNICAL LIBRARY  
CODE 4410  
K KAILASANATE  
J BORIS  
E ORAN  
NAVAL RSRCH LAB  
WASH DC 20375-5000

1 OFFICE OF NAVAL RSRCH  
ATTN CODE 473 R S MILLER  
800 N QUINCY ST  
ARLINGTON VA 22217-9999

NO. OF  
COPIES ORGANIZATION

1 OFFICE OF NAVAL TECHLGY  
ATTN ONT 213 D SIEGEL  
800 N QUINCY ST  
ARLINGTON VA 22217-5000

1 CDR  
ATTN CODE 730  
CODE R 13 R BERNECKER  
NAVAL SURFACE WARFARE CTR  
SILVER SPRING MD 20903-5000

7 CDR  
ATTN T C SMITH  
K RICE  
S MITCHELL  
S PETERS  
J CONSAGA  
C GOTZMER  
TECH LIB  
NAVAL SURFACE WARFARE CTR  
INDIAN HEAD MD 20640-5000

4 CDR  
ATTN CODE G30 GUNS & MUNITIONS DIV  
ATTN CODE G32 GUNS SYSTEMS DIV  
ATTN CODE G33 T DORAN  
ATTN CODE E23 TECH LIB  
NAVAL SURFACE WARFARE CTR  
DAHLGREN VA 22448-5000

5 CDR  
ATTN CODE 388 C F PRICE  
T BOGGS  
CODE 3895 T PARR  
R DERR  
INFORMATION SCIENCE DIV  
NAVAL AIR WARFARE CTR  
CHINA LAKE CA 93555-6001

1 COMMANDING OFFICER  
ATTN CODE 5B331 TECH LIB  
NAVAL UNDERWATER SYSTEMS CTR  
NEWPORT RI 02840

1 AFOSR NA  
ATTN J TISHKOFF  
BOLLING AFB DC 20332-6448

1 OLAC PL TSTL  
ATTN D SHIPLETT  
EDWARDS AFB CA 93523-5000

NO. OF  
COPIES ORGANIZATION

3 AL LSCF  
ATTN J LEVINE  
L QUINN  
T EDWARDS  
5 POLLUX DR  
EDWARDS AFB CA 93523-5000

1 WL MNAA  
ATTN B SIMPSON  
EGLIN AFB FL 32542-5434

1 WL MNME  
ENERGETIC MATERIALS BR  
2306 PERIMETER RD  
STE 9  
EGLIN AFB FL 32542-5910

1 WL MNSH  
ATTN R DRABCSZUK  
EGLIN AFB FL 32542-5434

2 NASA LANGLEY RSRCH CTR  
ATTN M S 408  
W SCALLION  
D WITCOFSKI  
HAMPTON VA 23605

1 CENTRAL INTELLIGENCE AGENCY  
OFC OF THE CENTRAL REFERENCES  
DISSEMINATION BRANCH  
ROOM GE 47 HQS  
WASHINGTON DC 20502

1 CENTRAL INTELLIGENCE AGENCY  
ATTN J BACKOFEN  
NHB ROOM 5N01  
WASHINGTON DC 20505

1 SDIO TNI  
ATTN L H CAVENY  
PENTAGON  
WASHINGTON DC 20301-7100

1 SDIO DA  
ATTN E GERRY  
PENTAGON  
WASHINGTON DC 21301-7100

NO. OF  
COPIES ORGANIZATION

2 HQ DNA  
ATTN D LEWIS  
A FAHEY  
6801 TELEGRAPH RD  
ALEXANDRIA VA 22310-3398

1 THE UNIV OF AUSTIN TEXAS  
ATTN T M KREHNE  
INSTITUTE FOR ADVANCED TECHLGY  
4030 2 W BRAKER LANE  
AUSTIN TX 78759-5329

2 CPIA JHU  
ATTN H J HOFFMAN  
T CHRISTIAN  
10630 LITTLE PATUXENT PWY  
STE 202  
COLUMBIA MD 21044-3200

1 AFELM THE RAND CORP  
ATTN LIBRARY D  
1700 MAIN ST  
SANTA MONICA CA 90401-3297

1 BRIGHAM YOUNG UNIV  
ATTN M BECKSTEAD  
DEPT OF CHEMICAL ENGRG  
PROVO UT 84601

1 CALIF INSTITUTE OF TECHLGY  
ATTN L D STRAND MS 125 224  
JET PROPULSION LAB  
4800 OAK GROVE DR  
PASADENA CA 91109

1 CALIF INSTITUTE OF TECHLGY  
ATTN F E C CULICK  
204 KARMAN LAB  
MAIN STOP 301 46  
1201 E CALIF ST  
PASADENA CA 91109

3 GEORGIA INSTITUTE OF TECHLGY  
SCHOOL OF AEROSPACE ENGRG  
ATTN B T ZIM  
E PRICE  
W C STRAHLE  
ATLANTA GA 30332

NO. OF  
COPIES ORGANIZATION

2 UNIV OF ILLINOIS  
ATTN H KRIER  
R BEDDINI  
DEPT OF MECH INDUSTRY ENGRG  
144 MEB 1206 N GREEN ST  
URBANA IL 61801-2978

1 UNIV OF MASSACHUSETTS  
ATTN K JAKUS  
DEPT OF MECHANICAL ENGRG  
AMHERST MA 01002-0014

1 UNIV OF MINNESOTA  
ATTN E FLETCHER  
DEPT OF MECHANICAL ENGRG  
MINNEAPOLIS MN 55414-3368

3 PENNSYLVANIA STATE UNIV  
ATTN V YANG  
K KUO  
C MERKLE  
DEPT OF MECHANICAL ENGRG  
UNIVERSITY PARK PA 16802-7501

1 RENSSELAER POLYTECHNIC INSTITUTE  
DEPT OF MATHEMATICS  
TROY NY 12181

1 STEVENS INSTITUTE OF TECHLGY  
ATTN R MCALEVY III  
DAVIDSON LABORATORY  
CASTLE POINT STATION  
HOBOKEN NJ 07030-5907

1 RUTGERS UNIVERSITY  
ATTN S TEMKIN  
DEPT OF MECH AND AEROSPACE ENGRG  
UNIVERSITY HEIGHTS CAMPUS  
NEW BRUNSWICK NJ 08903

1 UNIV OF UTAH  
ATTN A BAER  
DEPT OF CHEMICAL ENGRG  
SALT LAKE CITY UT 84112-1194

1 WASHINGTON STATE UNIV  
ATTN C T CROWE  
DEPT OF MECHANICAL ENGRG  
PULLMAN WA 99163-5201

NO. OF  
COPIES ORGANIZATION

1 ARROW TECHLGY ASSOC INC  
ATTN W HATHAWAY  
PO BOX 4218  
SOUTH BURLINGTON VT 05401-0042

3 AAI CORPORATION  
ATTN J FRANKLE  
D CLEVELAND  
J HEBERT  
PO BOX 126  
HUNT VALLEY MD 21030-0126

2 ALLIANT TECHSYSTEMS INC  
ATTN R E TOMPKINS  
J KENNEDY  
600 SECOND ST NE  
HOPKINS MN 55343

1 AVCO EVERETT RESEARCH LABORATORY  
ATTN D STICKLER  
2385 REVERE BEACH PKWY  
EVERETT MA 02149-5936

1 GENERAL APPLIED SCIENCES LAB  
ATTN J ERDOS  
77 RAYNOR AVE  
RONKONKAMA NY 11779-6649

1 UNITED DEFENSE LTD PARTNERSHIP  
ATTN ANTHONY GIOVANETTI  
4800 EAST RIVER RD  
MINNEAPOLIS MN 55421

5 LOCKHEED MARIETTA DEFENSE SYSTEMS  
ATTN J MANDZY  
I MAGOON  
P JORDAN  
D COOK  
R PATE  
100 PLASTICS AVE  
PITTSFIELD MA 01201-3698

1 IITRI  
ATTN M J KLEIN  
10 W 35TH STREET  
CHICAGO IL 60616-3799

NO. OF  
COPIES ORGANIZATION

4 HERCULES INC  
ATTN L GIZZI  
D A WORRELL  
W J WORRELL  
C CHANDLER  
RADFORD ARMY AMMO PLANT  
RADFORD VA 24141-0299

2 HERCULES INC  
ATTN WILLIAM B WALKUP  
THOMAS F FARABAUGH  
ALLEGHENY BALLISTICS LAB  
PO BOX 210  
ROCKET CENTER WV 26726

1 HERCULES INC  
ATTN R CARTWRIGHT  
AEROSPACE  
100 HOWARD BLVD  
KENVILLE NJ 07847

1 HERCULES INC  
ATTN B M RIGGLEMAN  
HERCULES PLAZA  
WILMINGTON DE 19894

1 MBR RESEARCH INC  
ATTN DR MOSHE BEN REUVEN  
601 EWING ST STE C 22  
PRINCETON NJ 08540

1 OLIN CORPORATION  
ATTN F E WOLF  
BADGER ARMY AMMO PLANT  
BARABOO WI 53913

3 OLIN ORDNANCE  
ATTN E J KIRSCHKE  
A F GONZALEZ  
D W WORTHINGTON  
PO BOX 222  
ST MARKS FL 32355-0222

1 OLIN ORDNANCE  
ATTN H A MCELROY  
10101 9TH ST NORTH  
ST PETERSBURG FL 33716

1 PAUL GOUGH ASSOC INC  
ATTN P S GOUGH  
1048 SOUTH ST  
PORTSMOUTH NH 03801-5423

NO. OF  
COPIES ORGANIZATION

1 PHYSICS INTERNATIONAL LIBRARY  
ATTN H WAYNE WAMPLER  
PO BOX 5010  
SAN LEANDRO CA 94577-0599

1 PRINCETON COMBUSTION RSRCH LABS INC  
ATTN N A MESSINA  
PRINCETON CORPORATE PLAZA  
11 DEERPARK DR BLDG IV SUITE 119  
MONMOUTH JUNCTION NJ 08852

3 ROCKWELL INTRNTNL  
ATTN BA08  
J FLANAGAN  
J GRAY  
R B EDELMAN  
ROCKETDYNE DIV  
6633 CANOGA AVE  
CANOGA PARK CA 91303-2703

2 ROCKWELL INTRNTNL SCIENCE CTR  
ATTN DR S CHAKRAVARTHY  
DR S PALANISWAMY  
1049 CAMINO DOS RIOS  
PO BOX 1085  
THOUSAND OAKS CA 91360

1 SCIENCE APPLICATIONS INTRNTNL CORP  
ATTN M PALMER  
2109 AIR PARK RD  
ALBUQUERQUE NM 87106

1 SOUTHWEST RSRCH INSTITUTE  
ATTN J P RIEGEL  
6220 CULEBRA RD  
PO DRAWER 28510  
SAN ANTONIO TX 78228-0510

1 SVERDRUP TECHLGY INC  
ATTN DR JOHN DEUR  
2001 AEROSPACE PWY  
BROOK PARK OH 44142

3 THIOKOL CORPORATION  
ATTN R WILLER  
R BIDDLE  
TECH LIB  
ELKTON DIVISION  
PO BOX 241  
ELKTON MD 21921-0241

NO. OF  
COPIES ORGANIZATION

1 UNIVERSAL PROPULSION COMPANY  
ATTN H J MCSPADDEN  
25401 NORTH CENTRAL AVE  
PHOENIX AZ 85027-7837

1 SRI INTERNATIONAL  
ATTN TECH LIB  
PROPULSION SCIENCES DIV  
333 RAVENWOOD AVE  
MENLO PARK CA 94025-3493

3 VERITAY TECHNOLOGY INC  
ATTN E FISHER  
R TALLEY  
J OWCZARKCZAK  
4845 MILLERSPORT HWY  
EAST AMHERST NY 14501-0305

NO. OF  
COPIES ORGANIZATION

ABERDEEN PROVING GROUND

1 CDR, USACSTA  
ATTN: STECS LI, R HENDRICKSEN

100 DIR, USARL  
ATTN: AMSRL-WT,  
I. MAY  
D. ECCLESHALL  
AMSRL-WT-P,  
A. HORST  
J. DANTE  
AMSRL-WT-WG, P. KASTE  
AMSRL-WT-PC,  
R. FIFER  
G. ADAMS  
W. ANDERSON  
R. BEYER  
S. BUNTE  
A. COHEN  
B. FORCH  
A. KOTLAR  
J. HEIMERL  
M. MILLER  
A. MIZIOLEK  
M. SCHROEDER  
J. VANDERHOFF  
AMSRL-WT-PA,  
T. MINOR  
A. BIRK  
C. BULLOCK  
T. COFFEE  
M. DEL GUERCIO  
J. DE SPIRITO  
A. JOHNSON  
A. JUHASZ  
G. KATULKA  
J. KNAPTON  
C. LEVERITT  
M. MCQUAID  
W. OBERLE  
P. REEVES  
I. STOBIE  
P. TRAN  
K. WHITE  
G. WREN  
R. ANDERSON  
A. BRANT  
L-M. CHANG  
J. COLBURN  
P. CONROY  
J. HEWITT

NO. OF  
COPIES ORGANIZATION

AMSRL-WT-PA (CONT)  
S. HOWARD  
G. KELLER  
D. KOOKER  
D. KRUCZYNSKI  
F. LIBERATORE  
M. NUSCA  
M. RIDGLEY  
F. ROBBINS  
T. ROSENBERGER (6 CPS)  
C. RUTH  
J. TUERK  
A. WILLIAMS  
AMSRL-WT-PD,  
G. GAZONAS  
M. LEADORE  
R. LIEB  
B. BURNS  
A. ABRAHAMIAN  
K. BANNISTER  
J. BENDER  
L. BURTON  
W. DRYSDALE  
T. ERLINE  
A. FRYDMAN  
D. HOPKINS  
R. KASTE  
S. WILKERSON  
AMSRL-WT-T, W. MORRISON  
AMSRL-WT-TA,  
W. GILLICH  
M. BURKINS  
AMSRL-WT-TB,  
R. FREY  
L. VANDE KIEFT  
AMSRL-WT-TC,  
W. DE ROSSET  
B. SORENSEN  
G. SILSBY  
AMSRL-WT-TD, A. DIETRICH  
AMSRL-WT-W, C. MURPHY  
AMSRL-WT-WG, L. PUCKETT  
AMSRL-WT-WA,  
H. ROGERS  
A. BARAN  
B. MOORE  
AMSRL-WT-WB,  
W. D'AMICO  
F. BRANDON  
AMSRL-WT-WC,  
T. BROSSEAU  
B. HAUG

NO. OF  
COPIES ORGANIZATION

AMSRL-WT-WC (CONT),  
M. KREGEL  
J. ROCCHIO  
AMSRL-WT-WD, A. NIILER  
AMSRL-WT-WE,  
J. TEMPERLEY  
J. THOMAS  
AMSRL-WT-PB,  
E. SCHMIDT  
M. BUNDY  
P. PLOSTINS  
D. LYONS



## USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number ARL-TR-871 Date of Report September 1995
2. Date Report Received \_\_\_\_\_
3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

CURRENT  
ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD  
ADDRESS

\_\_\_\_\_  
Organization

\_\_\_\_\_  
Name

\_\_\_\_\_  
Street or P.O. Box No.

\_\_\_\_\_  
City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)  
(DO NOT STAPLE)

---

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

**BUSINESS REPLY MAIL**  
FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR  
U.S. ARMY RESEARCH LABORATORY  
ATTN: AMSRL-WT-PA  
ABERDEEN PROVING GROUND, MD 21005-5066

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

